




**NIPPON  
PAINT**

# Tsuya Ichiban

Water-Based Top Coat  
立邦艶一番水性面漆

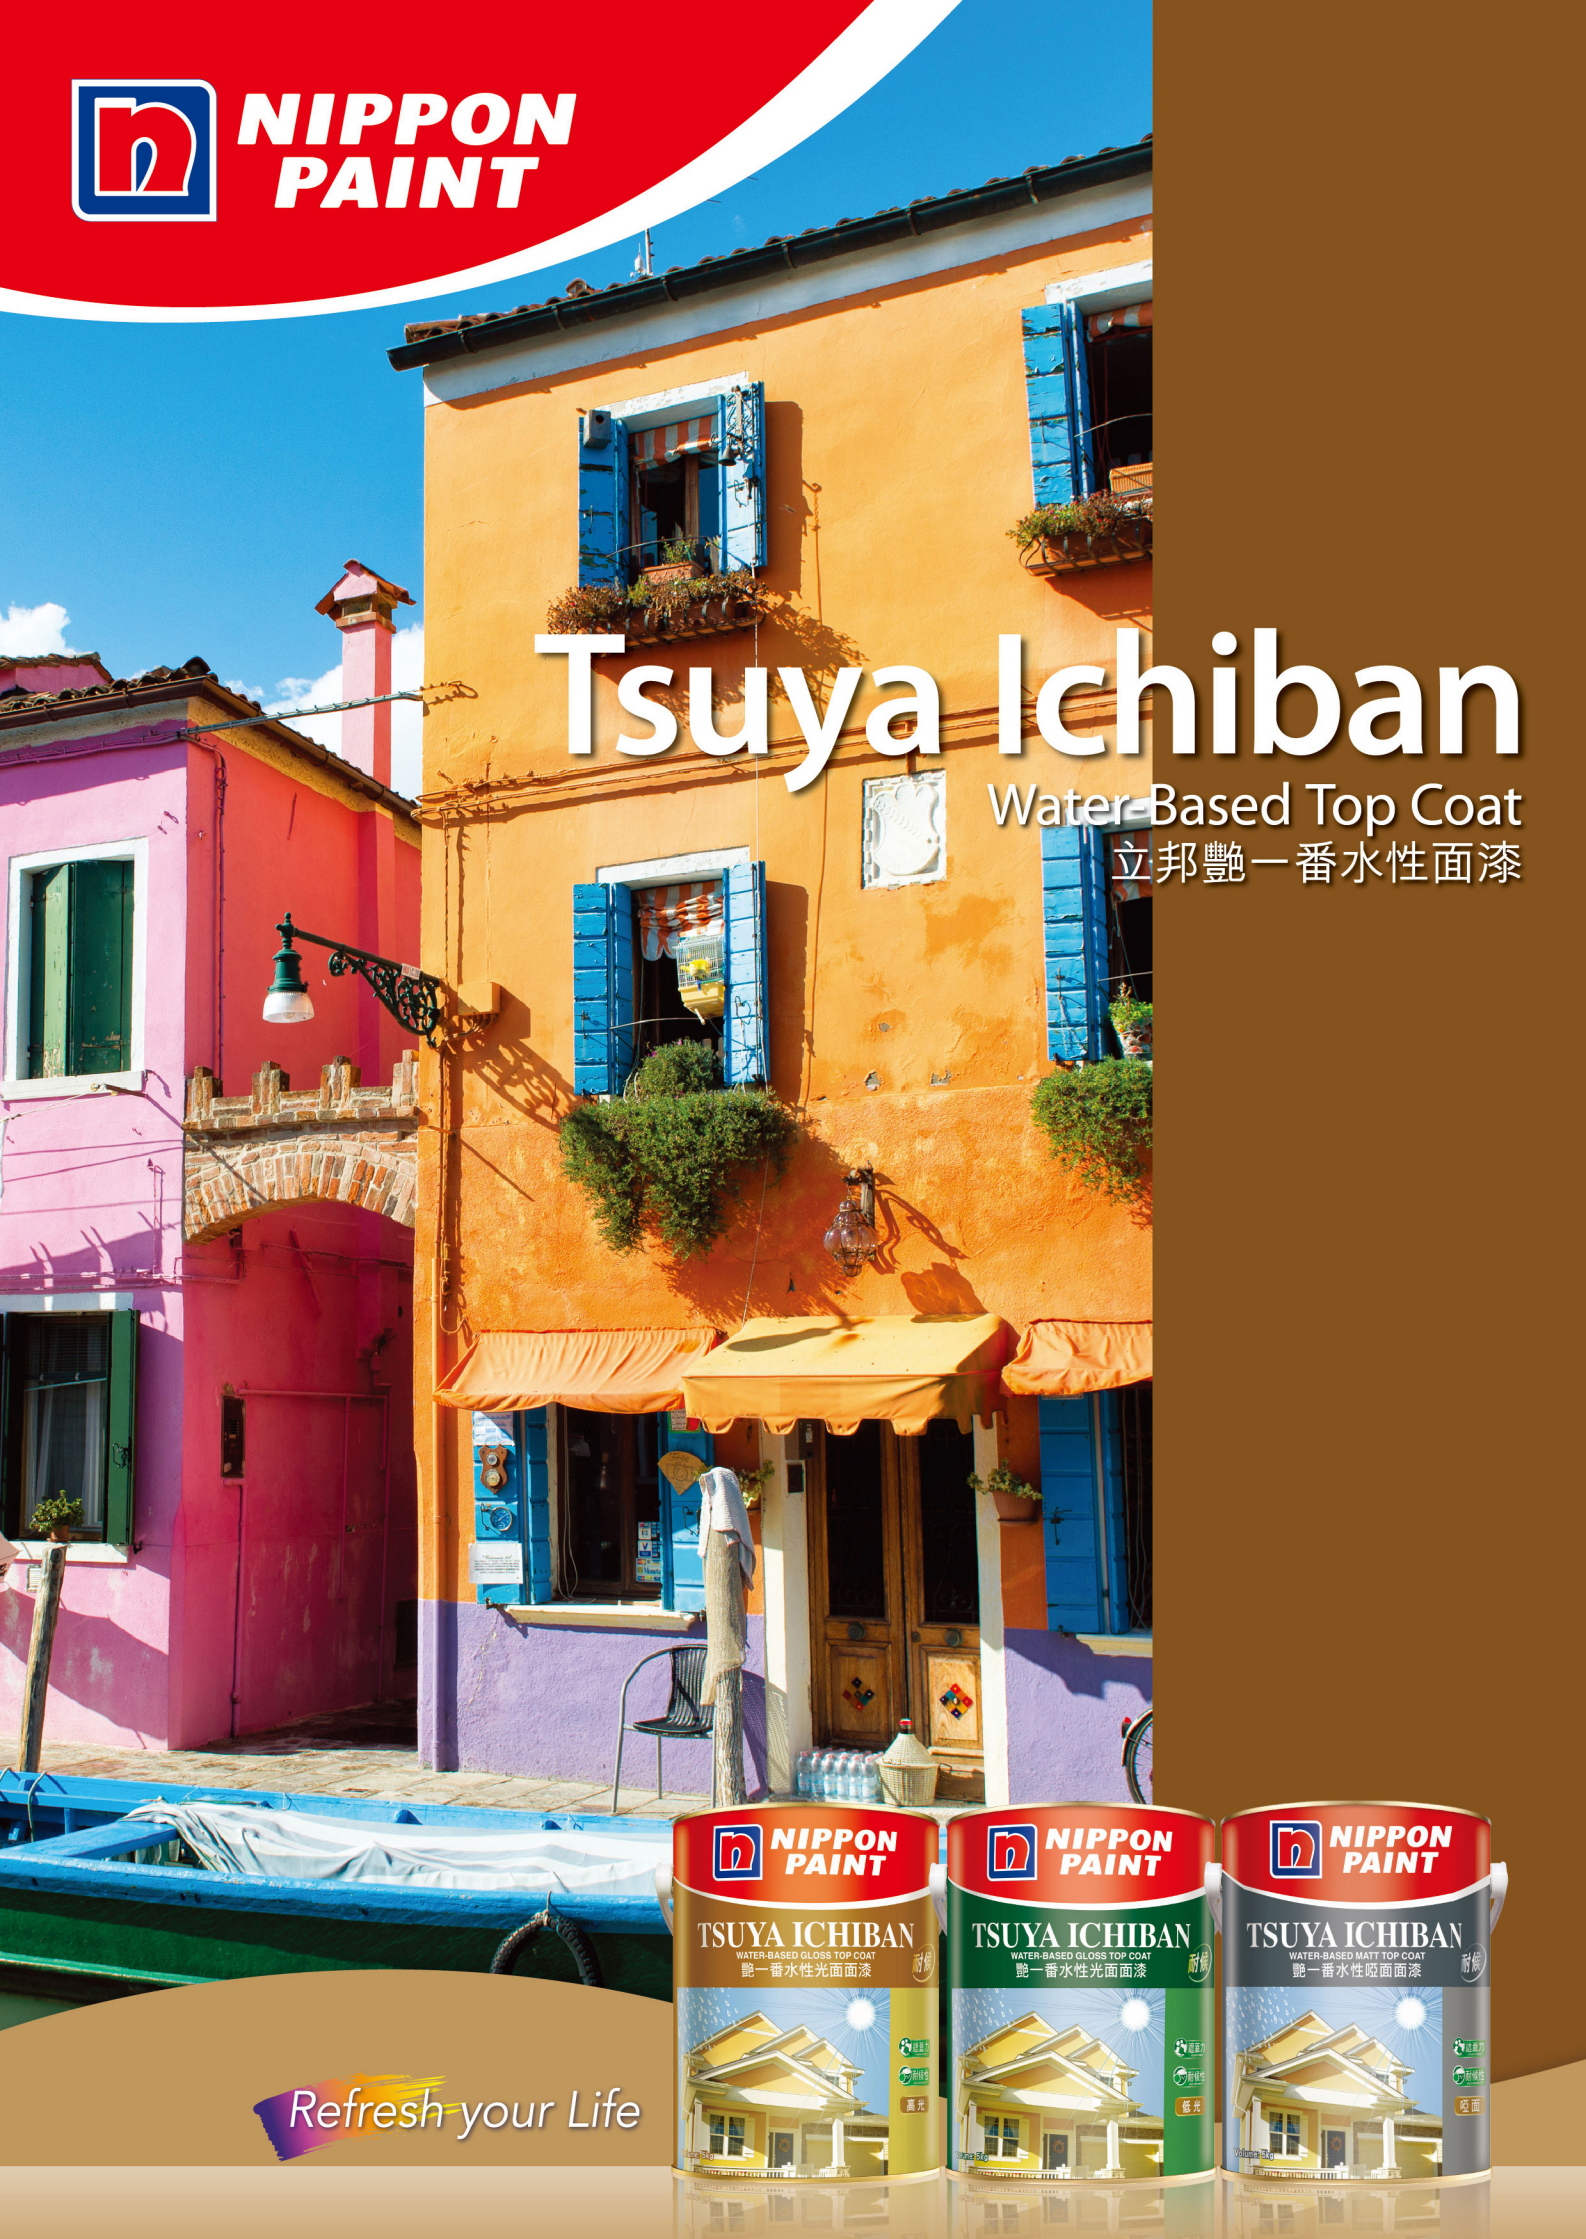


Refresh your Life




G2526



G2613




G2525



G2524



G2523



G2611



G2612



G2609




G2744




G2741




G2610



G2745



G2743



G2740




G2739




G2747




G2826



G2825



G2824



G2426



G2915




G2918



G2916



G2917



G2427




G2214




G2216



G2215



G2213



G2425

White/白色 (A2103) / Black 黑色

Also available in White (A2103) and Black. 另有白色(A2103)及黑色可供選擇。

All colours shown are closest to actual Nippon Paint Colours as modern printing techniques permit. The above standard colours are matt finish effect. As different gloss levels may affect the presented colours, for reference only. All colours are subject to the original paint colour.

本漆版是現代印刷技術所能印刷出最接近原漆顏色，以上標準色系列為啞面光澤，不同光澤會影響顏色效果，只作參考用途，一切顏色及光澤以原漆顏色為準。

# Nippon Paint Tsuya Ichiban Water-Based Top Coat

## 立邦艷一番水性面漆

Nippon Paint Tsuya Ichiban Water-Based Top Coat is a high quality acrylic emulsion. Applying with suitable sealer, it is perfect for interior and exterior protection for cement plastered, concrete, masonry, wood and metals. It's outstanding endurance against bad weather and alkalinisation allows the long-lasting colour stays vibrant and always looks just as new.

立邦艷一番水性面漆是具有優越清洗表現的高性能塗料，配合適當底漆，即可用於不同物料的室內外牆壁，如水泥沙漿，木材及金屬等，為牆壁和天花提供絕佳保護。其超強耐性可抵禦長時間的風吹雨打或鹼性物質之侵襲，穩如泰山，屹立不倒。

### Outstanding Feature 產品特點

- Good Weathering Resistance 耐候性強
- Easy Application 施工容易
- Good Coverage And Good Opacity 遮蓋力高
- Anti-Bacterial And Alkali Resistance 抗鹼防菌
- Fast Dry 快乾

### Theoretical Coverage 理論覆蓋值

- 6.7 sq.m/kg/coat (30 microns DFT)
- 6.7 平方米/公斤/層 (乾膜厚度: 30微米)

### Drying Time (at 20°C)

- Touch dry 觸乾時間 :**  
15 minutes 15分鐘
- Recoating 重塗間隔時間 :**  
At least 4 hours 最少4小時

### Packing 包裝

5 Kg, 16 Kg 5公斤, 16公斤

### Finish 光澤


High Gloss 高光

Low Gloss 低光


Matt 啞面



G2609



G2609



G2609



# Technical Information

## 技術資料

### Surface Preparation 表面處理

- Prepare unpainted surface 新建牆面：  
Remove any dust, grease and loose matter. Surface should be clean, dry & stable.  
清除表面灰塵、油膩和鬆散泥灰，如果有孔隙及時修補，確保牆面清潔乾燥和平整。
- Prepare painted surface 重塗牆面：  
Remove old layers, dust and contaminant. Sand all glossy, rough or patchy surfaces.  
剷除舊牆面不牢固的漆膜，清除表面灰塵粉化物和雜質，批平打磨，清洗並徹底乾燥。

### Recommended Application 施工方法

- 1 coat of Nippon Paint Ultra Sealer III.  
一層立邦超級封牆底漆III。
- 2 coats of Nippon Paint Tsuya Ichiban Water-Based Top Coat.  
兩層立邦艷一番水性面漆。

### Dilution 稀釋

- Using brush and roller — dilute with 5-10% (volume) clean water.  
刷塗或輥塗- 可加入5-10% (體積比)的清水稀釋。
- Using airless spray — dilute with 5-10% clean water.  
無氣噴塗 — 可加入5-10% 的清水稀釋。
- Stir well before use.  
使用前應攪拌均勻。

### Paint Guide 施工教學



## Related Products

### 配套產品

#### Surface Preparation 牆面處理



**Nippon Paint Ultra Sealer III**  
立邦超級封牆底漆 III  
Sealing and adhesive powers  
封閉底材及提供附著力



**Nippon Paint Anti-fungus Solution**  
立邦水性防霉劑  
Killing mould and algae  
除霉殺菌

#### Surface Protection 牆面保護



**Nippon Paint Masker Tape**  
立邦和紙保護膜  
Good covering effect and convenient  
周全保護，整潔方便



**Nippon Paint Adhesive Tape**  
立邦和紙膠帶  
Good colour separation and no residual glue  
分色整齊，不留殘膠

#### Tool 工具




**Nippon Paint Premium All-in-One Paint Brush**  
立邦金裝全能油掃  
Good absorption and smooth finishing  
吸油量高，鬆得細緻



**Nippon Paint Classic Polyester Roller**  
立邦快塗寶經典油輥  
High efficiency and even finish  
塗刷速度快，均勻細膩

即享nClub非凡體驗



**NIPPON PAINT (H.K.) CO., LTD.**

Tel: (852) 2699 9333 Fax: (852) 2602 8844 Email: np@nipponpaint.com.hk

www.nipponpaint.com.hk

A MEMBER OF THE NIPSEA GROUP



Nippon Paint Hong Kong



nipponpainthk

