



**NIPPON
PAINT**

Matex M600

Interior Emulsion Paint
立邦美得麗M600內牆乳膠漆



Refresh your Life



Nippon Paint Matex M600

Interior Emulsion Paint
立邦美得麗M600內牆乳膠漆

Nippon Paint Matex M600 Interior Emulsion Paint is ideal for interior walls and ceilings. It dries to a tough, smooth and durable matt finish. It is long lasting, fungus and alkali resistant with excellent adhesion, easy application, good coverage / opacity and matching your simple yet tasteful lifestyle.

立邦美得麗 M600 內牆乳膠漆，品質卓越，啞光漆面為室內牆壁及天花添上持久色彩。它具備抗鹼及防霉功能，有效防止藻類滋生。它更擁有卓越附著力，遮蓋力高，令施工更容易，漆膜耐久且不易剝落。總括而言，其簡單而實用的優點，正好符合享受平淡、反璞歸真的您。

Outstanding Feature 產品特點

- 📍 Anti-Fungus and Alkali Resistant 抗鹼防霉
- 📍 Good Coverage 遮蓋力高
- 📍 Excellent Adhesion 附著力強
- 📍 Easy Application 施工容易

Theoretical Coverage 理論覆蓋值

12.7 sq.m/litre/coat (30 microns DFT)

12.7 平方米/升/層 (乾膜厚度: 30微米)

Drying Time (at 25-30°C)

- 📍 **Touch dry 觸乾時間：**
At least 30 minutes 最少30分鐘
- 📍 **Recoating 重塗間隔時間：**
At least 2 hours 最少2小時

Packing 包裝

5 Litre, 18 Litre 5升, 18升


Finish 光澤

Matt 啞面







Standard Colours / 標準色系列

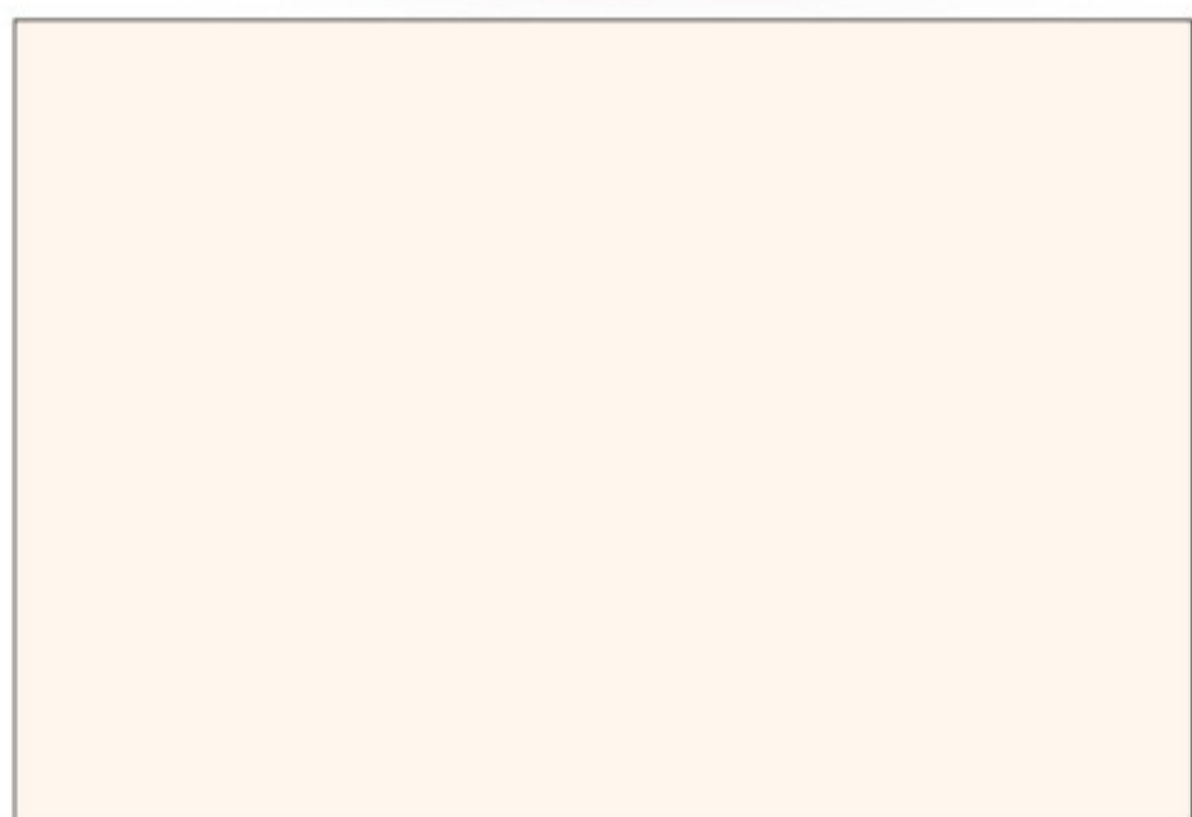


珍珠 A1741




乳酪 A1763




大麥 A1740

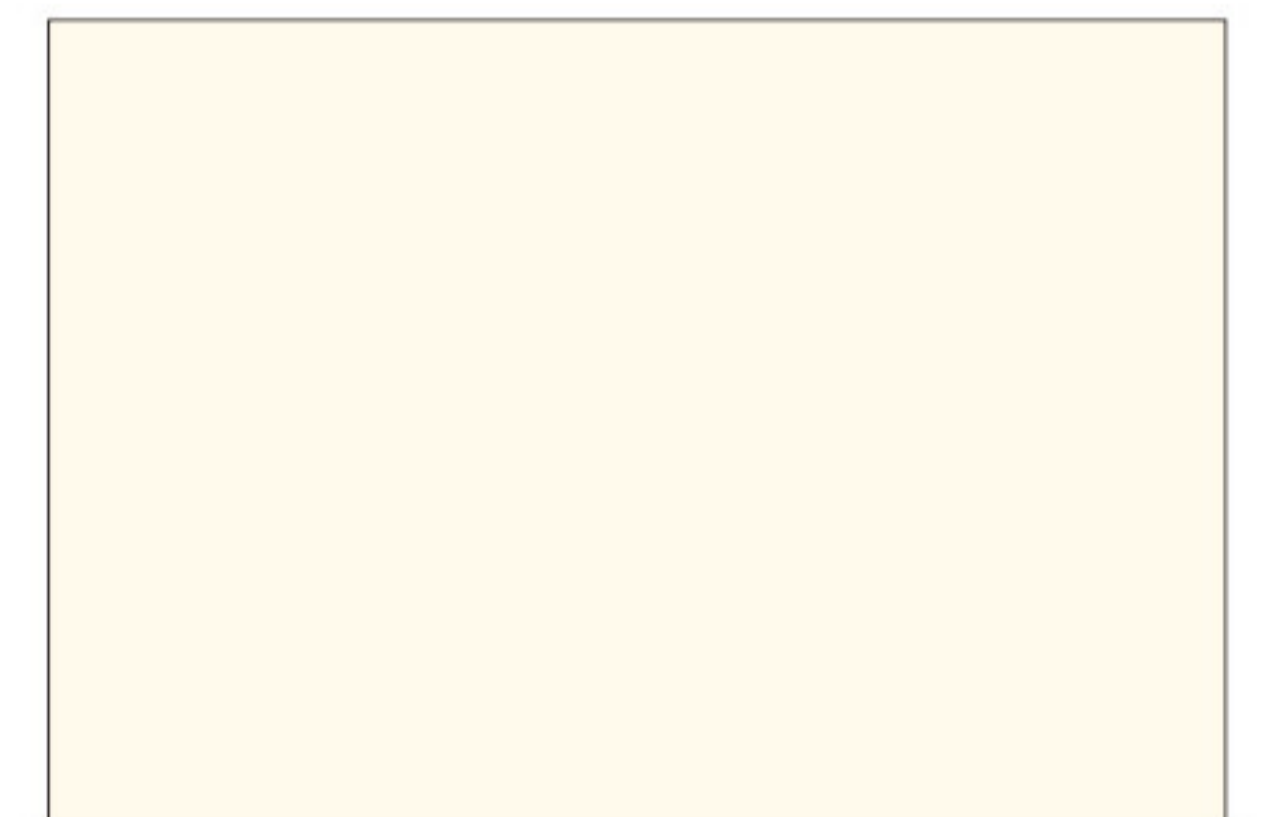


大麥彩 A1764




薄荷葉 A1826



風鈴草 A1825




康乃馨 A1523




玫瑰 A1522




晴空 A1916



湖泊 A1917



薰衣草 A1214

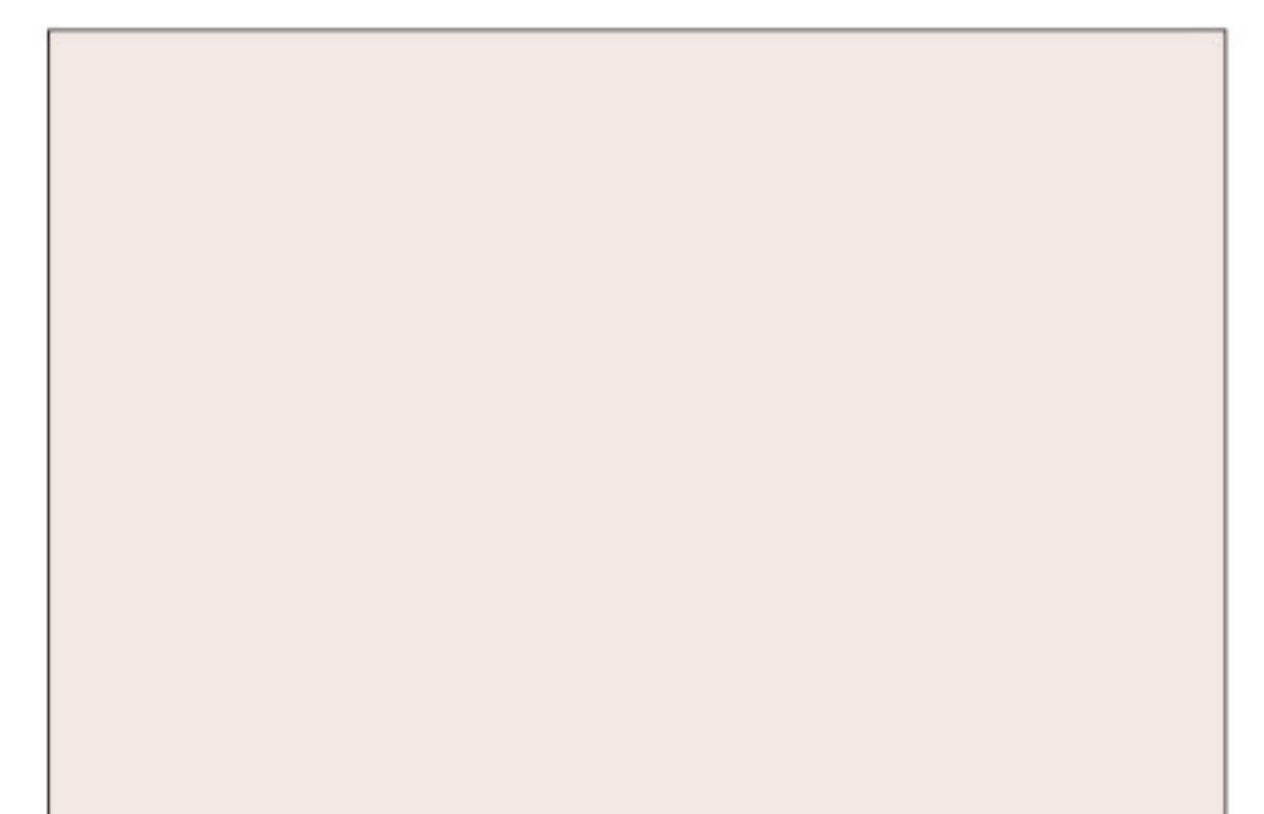

紫丁香 A1213

White 白色 (A1101) / Black 黑色 (A1400)

Also available in White (A1101) and Black (A1400) 另有白色 (A1101)及黑色 (A1400)可供選擇。

All colours shown are closest to the actual Nippon Paint Colours as modern printing techniques permit, for reference only. All colours are subject to the original paint colour. 本漆版是現代印刷技術所能印出最接近原漆的顏色，只作參考用途。一切顏色以原漆顏色為準。

Technical Information

技術資料

Surface Preparation 表面處理

- Prepare unpainted surface 新建牆面：
Remove any dust, grease and loose matter. Surface should be clean, dry & stable.
清除表面灰塵、油膩和鬆散泥灰，如果有孔隙及時修補，確保牆面清潔乾燥和平整。
- Prepare painted surface 重塗牆面：
Remove old layers, dust and contaminant. Sand all glossy, rough or patchy surfaces.
剷除舊牆面不牢固的漆膜，清除表面灰塵粉化物和雜質，批平打磨，清洗並徹底乾燥。

Recommended Application 施工方法

- 1 coat of Nippon Paint Vinilex 5101 Wall Sealer.
一層立邦永得麗 5101水性封牆底漆。
- 2 coats of Nippon Paint Matex M600 Interior Emulsion Paint.
兩層立邦美得麗 M600 內牆乳膠漆。

Dilution 稀釋

- Using brush and roller — dilute with max. 20% (volume) clean water.
刷塗或輥塗 - 可加入不多於20%(體積比)的清水稀釋。
- Stir well before use. 使用前應攪拌均勻。

Paint Guide 施工教學



Related Products

配套產品



Nippon Paint Anti-Fungus Solution 立邦水性防霉劑

It serves to exterminate the fungus or algae
深入霉菌頑固根部，消滅牆面霉菌

Nippon Paint Vinilex 5101 Wall Sealer

立邦永得麗5101水性封牆底漆

NIPPON PAINT (H.K.) CO., LTD.

Tel: (852) 2699 9333 Fax: (852) 2602 8844 Email: np@nipponpaint.com.hk

www.nipponpaint.com.hk
A MEMBER OF THE NIPSEA GROUP

